

SITEFLEX SECURE[®] SPBS

OUTDOOR POWER AND BATTERY SOLUTION

OVERVIEW

The SiteFlex[®] Secure outdoor power and battery solution is designed as a robust alternative for sites where there is a demand for an improved theft protection. Batteries are protected by heavy duty steel armor. The door locking mechanism is design with 5 point locking hooks. The swing handle has a protective cover and is designed for heavy duty padlocks.

The solution includes a factory installed AC-distribution, a 48VDC 24kW power supply system with remote control features, DC-distribution and I/O possibilities.

Product features

- Anti-theft protection (armor) of the batteries
- Concealed mounting of padlocks for the battery armor front (Padlocks on request)
- Anti-theft protection of the door hinges
- Anti-theft protection of the door handle and padlock
- Base plinth with removable side protection
- Power compartment
 - 9RU 19" rack space
 - 4RU 19" free space for customer equipment
 - DAC (Direct air cooling)
- Battery compartment
 - Air conditioner
 - EVS (Emergency Ventilation System)
 - Passive hydrogen ventilation
 - Supported batteries SBS 170/190Ah lead-acid batteries
 - OPzV 600 2V blocks (On requests)



POWER COMPARTMENT



MECHANICAL

- 19" 4RU for customer equipment



THERMAL MANAGEMENT

- DAC (Direct Air Cooling)
- Cooling capacity: 1400W @ $\Delta t=10K$
- 2 x 48VDC axial fans, speed controlled
- M5 air filter for air inlet, G4 filter matt for air outlet



AC SYSTEM

- 19" 3RU AC distribution with surge arrester
- Service outlet with RCB
- Circuit breakers for power supply system
- MET (Main Earth Terminal)



ELECTRICAL

- Door, DAC, ACU, OVP alarms
- Grounding bar and cables
- Battery cables
- Service light



DC POWER SYSTEM SPECIFICATION

- 5RU 48VDC 24kW Power supply system
- Cordex HP controller, Cordex HP L-ADIO
- Cordex 3kW rectifier modules (ordered separately)
- DC Distribution with load and battery CBs
- Battery temperature sensor
- Ref. data sheet for power system E-CXPS-48-24

BATTERY COMPARTMENT



MECHANICAL

- Anti-theft protection armor for the batteries
- Concealed mounting of padlocks of the armor front (Padlocks on request)
- Rack for 4 strings of 12V SBS170/190Ah
- Rack for 1 string of OPzV600 2V on request
- Passive hydrogen ventilation



THERMAL MANAGEMENT

- 48 VDC Air conditioner
- Cooling capacity: 800W @35/35°C
- Refrigerant: R134a
- EVS (Emergency Ventilation Cooling)

GENERAL



ENCLOSURE DESIGN

- Powder painted aluzinc / zinc coated steel sheet
- Thermal insulation 12 – 50mm XPS/PIR
- Outer finish: polyester powder paint light grey (RAL 7035)
- Concealed hinges with security brackets
- Door handle for padlock protected by security cover
- Four point door locking mechanism
- 18 x PG cable inlets at bottom
- Anchor bolts 4 pcs.



ENVIRONMENT

- IP54 for power comp. / IP44 for battery comp.
- Operating temperature range: -10°C to +50°C
- Humidity: 0-100% (no condensation)




STANDARDS AND CERTIFICATION

- Product safety acc. to EN 62368-1 and EN 60950-22
- Environmental protection IP54 for power compartment acc. to EN 60529
- Environmental protection IP44 for battery compartment acc. to EN 60529
- Burglar protection RC4 acc. to EN 1627
- The product is RoHS compliant acc. to EU directive 2011/65/EU
- The product is WEEE compliant acc. to EU directive 2012/19/EU




DIMENSIONS

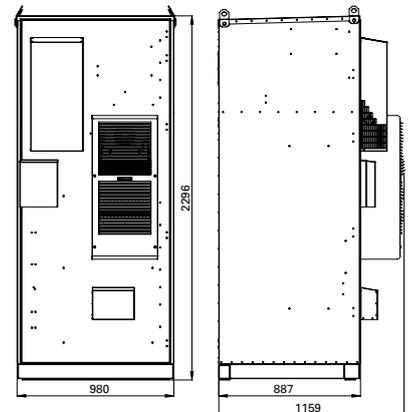

Outdoor Power and Battery Solution

40'HC container load: 20 pcs.



Part number	2000005676
Weight kg	600



EnerSys World
Headquarters
2366 Bernville Road, Reading,
PA 19605, USA
Tel: +1-610-208-1991 / +1-800-538-3627

EnerSys EMEA
EH Europe GmbH
Baarerstrasse 18
6300 Zug
Switzerland

EnerSys Asia
152 Beach Road,
Gateway East Building #11-08,
Singapore 189721
Tel: +65 6416 4800