EnerSys®
Power/Full Solutions

HAWKER®

Ni-Cd Aviation Battery
F 20/25 H1C T2

For over 75 years, Hawker safety plus power Ni-Cd batteries have been manufactured using Sinter/Sinter electrodes designed to deliver high power and high energy density. These batteries have a long-proven service life.

Very long storage period and service life, operational efficiency and reliable electrical performance can be highlighted as major advantages of this battery type for helicopter applications of our customers. This battery type is successfully operated aboard hundreds of helicopters of BO105, BK-117, SW-3 and SW-4 types.

Facts at a Glance

Type Number:	3349025920
Part Number:	2315355

Technical Data

Voltage, V:	24
Capacity, Ah:	25
Dimensions, mm:	L 276 W 248 H 223
Weight, kg:	26
Operating Temp:	-40°C to 70°C
Main Connector:	MS 3509
Approval:	EASA 21O.10059981 (20.320/18 TS)

Hawker® Aviation Batteries are OEM approved and can be used aboard: MBB/ Eurocopter/Airbus Helicopters BO 105, BK 117, PZL Sokol W-3, 4

Visit us at **www.enersys.com/aviation**

Ni-Cd Aviation Battery
F 20/25 H1C T2

Product Data	
Technology	Ni-Cd
Model	F 20/25 H1CT2
Type Number	3349025920
Part Number	2315355
Nominal Voltage	24V
I_{pp}	1250 A
I_{pr} (25°C)	1025 A
Length (mm)	276
Width (mm)	248
Height (mm)	223
Typical Weight (kg)	26 kg
Operating Temperature	-40°C to +70°C
Main Connector	MS 3509
Approval	EASA 21O.10059981 (20.320/18TS)

HAWKER® airborne batteries are used for:

- Starting engines or APUs
- Operations on ground and in flight
- Emergency back up

Features & Benefits

- Low internal resistance allows a high current discharge, giving excellent power output for Auxiliary Power Unit (APU) operating in temperatures between -30°C and +70°C
- High capacity at low temperatures and rapid recharge with constant voltage to 100% capacity ensures exceptional reliability even in emergency conditions
- Initial high current and a constant voltage supply, resulting from Hawker's exclusive technology of thin electrodes with a very low internal resistance, delivers optimum charge during flight
- The specially designed separator material remains stable even in high temperatures, ensuring a high level of safety and producing no 'thermal run-away'. (Overcharging tests [28,5 V / 50 °C / 500h] show no defects to the separator material as well as to the complete cells)
- Optimum storage conditions of +10°C to +35°C and 45% to 75% humidity facilitate a long life expectancy
- The cell design, with its high electrolyte content, gives rise to very low levels of self-discharge
- Low water consumption, a plentiful supply of electrolyte and no decrease in useable capacity

Dimensions

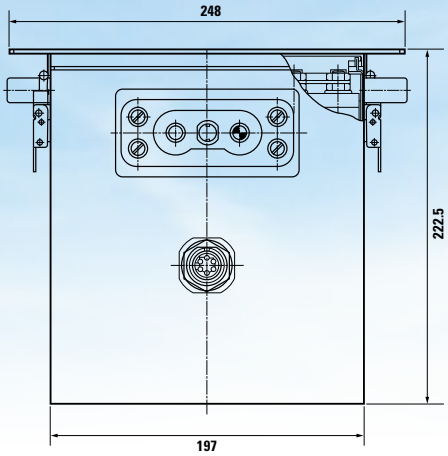

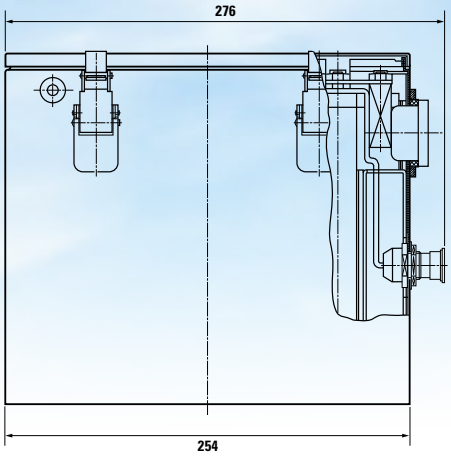

World Headquarters
2366 Bernville Road
Reading, PA 19605 USA
+1-610-208-1991 / +1-800-538-3627

EnerSys EMEA
EH Europe GmbH
Baarerstrasse 18
6300 Zug Switzerland

EnerSys Asia
No. 85, Tuas Avenue 1
Singapore 639518
+65 6558 7333

Visit us at: **www.enersys.com/aviation**

© 2025 EnerSys. All rights reserved. Trademarks and logos are the property of EnerSys and its affiliates unless otherwise noted. Subject to revisions without prior notice. E.&O.E

EMEA/APAC-EN-DS-HAW-F20/25H1CT2-0825